



ELCA
PROFESSIONAL LIGHTING

INSTALLATION INSTRUCTIONS

Downlight Classic



Power	Volt	IP
7 W	Low Voltage	20
10 W	Low Voltage	20
14 W	Low Voltage	20
20 W	Low Voltage	20
30 W	Low Voltage	20


Electrical

- 220 VAC
- Constant Current Driver

Requirements


- Holesaw (Matabor)
- Wire Connector

Dimension - 7 W

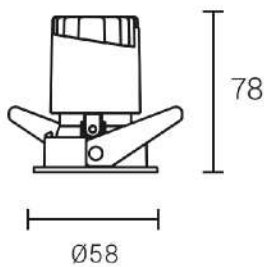


Ø50mm

Dimension - 10 W

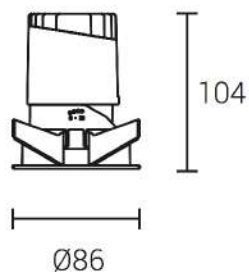


Ø75mm

Dimension - 14 W

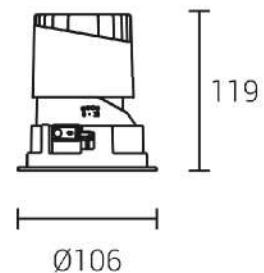


Ø95mm

Dimension - 20 W

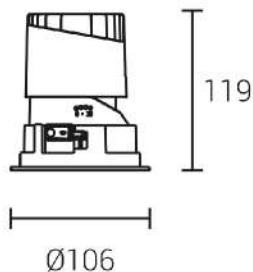

Ø95mm

Dimension - 30 W

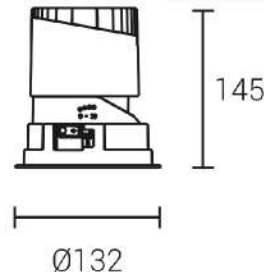


Ø120mm


PERINGATAN

1. Ikuti petunjuk instalasi, garansi tidak berlaku jika instalasi tidak sesuai dengan petunjuk
2. Lampu menggunakan 'Constant Current Driver'
3. Pastikan sumber listrik mati sebelum pemasangan instalasi lampu
4. Dilarang membuka komponen isi lampu, garansi tidak berlaku jika lampu telah dibuka

Constant Current Driver - On/Off Installation

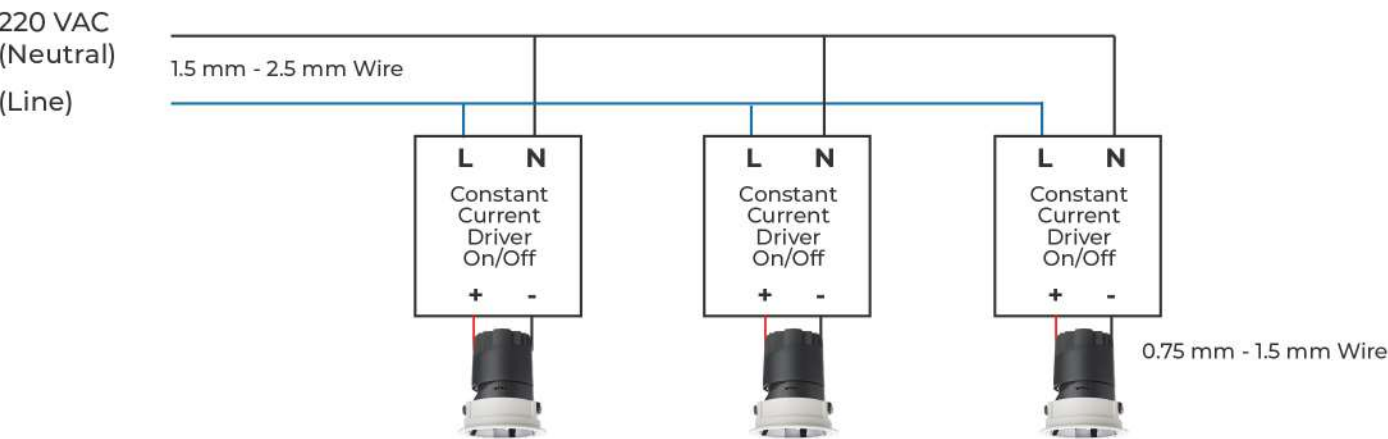

Constant Current Driver - Triac Installation

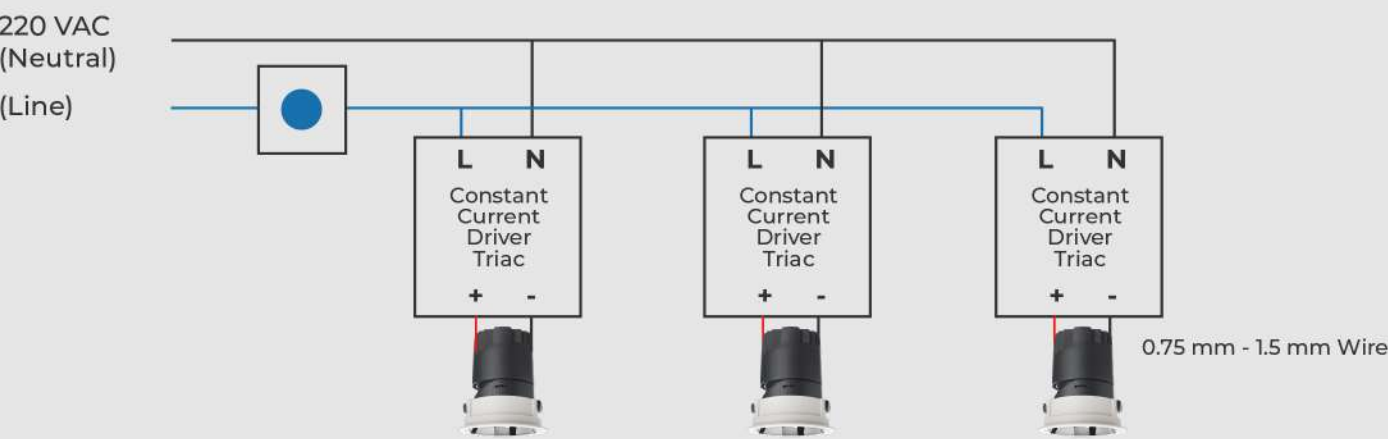

Constant Current Driver - 0 - 10 V & Dali Installation

