

Led Striplight



Pure clarity and high color rendering index light effect for indirect lighting

FEATURES

Double Layer Protection

High Color Rendering Index (CRI)

High Thermal Conductivity

Portable Installation

ELECTRICAL

Input	220-240VAC
Output	24VDC
Dimming Support	On-off / Triac / 0-10V





SPECIFICATIONS

Power	9.6W	14.4W
CCT	2700-6000K	2700-6000K
Angle Beam	120°	120°
CRI	80/90	80/90/95
IP	20/67	20/67
Led Source	60 Led / Meter	120 Led / Meter

DIMENSIONS

9.6W

14.4W

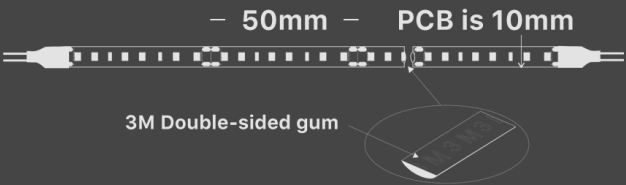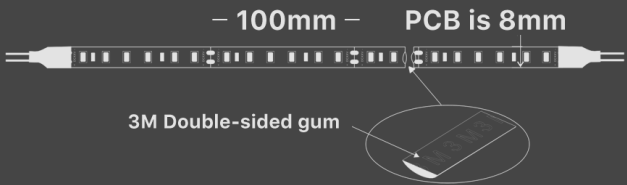

MATERIAL

LED SMD2835 : Epistar / Sanan
Printed Circuit Board
Copper
Gold Wire

LUMENS

9.6W : 750-850 lumens
14.4W : 1150-1250 lumens

ACCESSORIES

Power Supply
Aluminum Profile

WARRANTY

2 years

LIFESPAN

30,000-50,000 hours

CERTIFICATIONS

